

06/01/00
JCS836
U.S. PTO

Please type a plus sign (+) inside this box →

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 1999-30

First Inventor or Application Identifier Iu

Title Secure Oblivious Watermarking Using Key-Dependent

Express Mail Label No. _____

APPLICATION ELEMENTS
See MPEP chapter 600 concerning utility patent application contents.

1. * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. Specification [Total Pages 33]
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. Drawing(s) (35 U.S.C. 113) [Total Sheets 9]
4. Oath or Declaration [Total Pages _____]
 - a. Newly executed (original or copy)
 - b. Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

5. Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. Computer Readable Copy
 - b. Paper Copy (identical to computer copy)
 - c. Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. Assignment Papers (cover sheet & document(s))
8. 37 C.F.R. § 3.73(b) Statement Power of
(when there is an assignee) Attorney
9. English Translation Document (if applicable)
10. Information Disclosure Statement (IDS)/PTO-1449 Copies of IDS
Statement (IDS)/PTO-1449 Citations
11. Preliminary Amendment
12. Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. * Small Entity Statement(s) Statement filed in prior application,
(PTO/SB/09-12) Status still proper and desired
14. Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. Other: _____

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

Continuation Divisional Continuation-in-part (CIP)


of prior application No: _____

Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

<input checked="" type="checkbox"/> Customer Number or Bar Code Label		23823 (Insert Customer No. or Attach bar code label here)	or <input type="checkbox"/> Correspondence address below		
Name	David G. Grossman				
Address	1408 Bayshire Lane				
City	Herndon	State	VA	Zip Code	20170
Country	USA	Telephone	(703)481-3360		Fax (703)481-3361

Name (Print/Type)	David G. Grossman	Registration No. (Attorney/Agent)	42,609
Signature			Date June 1, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

JCS836 U.S. PTO
06/01/00

JCS836 U.S. PTO
06/01/00

5

Application for United States Letters Patent

of

Siu-Leong Iu

10 Wai C. Chu

for

Secure Oblivious Watermarking using Key-Dependent Mapping Functions

Secure Oblivious Watermarking using Key-Dependent Mapping Functions**Technical Field**

This invention relates generally to data protection, and more particularly to aspects of
5 a novel digital watermark system and methodology for multimedia content, such as audio,
video, text, still images, computer graphics, and software.

Cross-reference to Related Application

The present application claims the benefit of provisional patent application Serial No.
10 60/136,961 to Iu et al., filed on June 1, 1999, entitled "Secure Oblivious Watermarking using
Key-Dependent Mapping Functions", which is hereby incorporated by reference.

Background Art

A watermark is an imperceptible or at least difficult to perceive signal embedded into
15 multimedia content such as audio, video, text, still images, computer graphics, or software.

The watermark conveys some useful information without disturbing or degrading the
presentation of the content in a way that is noticeable or objectionable. Watermarking
techniques play an important role in protecting copyright ownership of digital contents
including images, audio, and video. Watermarks may be used to identify the original owner
20 of the content, to trace where pirate copies of the content come from (fingerprinting), and to
determine royalty payments by monitoring the number of times content has been used.

Watermarks may also be used to authenticate original content and to locate change in a
corrupted or altered copy of the content. In order to encourage copyright owners to use
watermarking schemes, four basic and conflicting requirements should be met. Firstly, the
25 distortion introduced by embedding the watermarks into content should be unperceivable by

3

regular users. Secondly, the watermarks should be secure so that they are hard to be modified or removed by the pirates. Thirdly, the watermarks should be robust against intentional attacks, ranging from simple content manipulation such as cropping, to common image processing techniques, such as filtering and compression. Lastly, the overall cost of using 5 watermarking should not be expensive.

Watermarking schemes may be categorized as non-oblivious or oblivious, depending on whether the original content is available or not. Oblivious watermarking may be defined as a watermarking scheme in which the original image is not available during watermarking decoding. Non-oblivious image watermarking schemes in general may be more robust due to 10 the accessibility of the original image because image distortions caused by image processing, transmission, or intentional attacks may be compensated for using the original image. Also, the interference between the original image and the watermarks during watermark decoding may be removed by using the difference of the watermarked and original images. However, for many applications, such as copy and playback control, and copyright protection, the 15 requirement of accessing the original image is simply not practical. This may make oblivious watermarking the only choice.

Watermarks may be embedded in the pixel or the transform domains. Two papers which discuss and compare different methodologies and watermarking schemes include "A fair benchmark for image watermarking systems", by M. Kutter and F. A. P. Petitcolas, (SPIE 20 Electronic Imaging' 99: Security and Watermarking of Multimedia Contents, vol. 3657, Jan. 1999), and "Comparing robustness of watermarking techniques" by J. Fridrich and M. Goljan (SPIE Electronic Imaging' 99: Security and Watermarking of Multimedia Contents, vol. 3657, Jan. 1999). Proposed transforms include DCT, DFT, LOT, wavelets, Hadamard transform and key-dependent transforms. The watermark signal in a transform domain may usually be 25 related to that in the pixel domain by a linear transformation, if the transform itself is linear.

However, the analysis may be applied to pixel-based approaches as well. Human visual models have been used to adjust watermark strength so that embedded watermarks may be invisible. Spread-spectrum techniques are widely used by most oblivious watermarking approaches. When extracting the watermark message, these methods may rely on the 5 watermark information embedded in the middle frequencies, although the noise-like watermark signal may also be embedded in the low and the high frequencies. The watermark information in the high frequencies may be easily removed using low-pass filtering and JPEG compression, and humans may be able to tolerate high distortion there. For low frequencies, watermark signals may have a high interference with the image itself. Note that the energy of 10 a typical image may be concentrated in the lower frequencies.

For non-oblivious watermarking, adding watermarks in the low frequencies has been shown to have some advantages in a paper entitled "A review of watermarking and the importance of perceptual modeling", by I. Cox and M. Miller, Proc. of the SPIE Human Vision and Electronic Imaging, vol. 3016, pp. 92-99, Feb. 1997. More watermark messages 15 may be sent while the noise level of the image does not increase. Watermarks in the low frequencies in general may be more robust than that in the middle frequencies, with respect to image distortions that have low-pass characteristics, such as filtering. Examples of nonlinear filtering, may include median filtering, lossy compression filtering, and adaptive Wiener filtering. Watermarks in the low frequencies may also be less sensitive to small geometric 20 distortions (e.g., rotation, shifting, and scaling). Therefore, seeking oblivious watermark schemes unitizing the low frequencies and distortion compensation techniques without the original image have become two active research topics.

Several watermark attack and counterattack methods have been proposed. To overcome a geometric attack, small blocks of a corrupted image may be registered with an 25 original pseudo noise signal using correlation matching. Watermarks may also be removed

by capturing watermark information pixel by pixel with a sensitivity attack if a pirate has access to a device that can detect whether the content contains a watermark or not.

To handle distortions without the original image, a calibration pattern may be embedded into the Fourier transform in the log-polar coordinates, so that the shift, scaling, and rotation of the image may be compensated.

Some oblivious watermarking approaches using the low frequency bands have been proposed including embedding watermark information by swapping selected transform coefficients of 8x8 DCT blocks. The robustness of this type of approach may not be high and visible distortions may be introduced.

10 Another approach includes embedding watermark message bits into disjoint triplets of wavelet coefficients, which may be chosen according to a key-dependent random sequence. The middle coefficient may be quantized by a quantization step, what is equal to the difference of the largest and the smallest values of the triplet, divided by a fixed scale factor. This approach may not be applied to DCT coefficients since the standard deviation of the 15 DCT coefficients in low frequencies may typically be very high. This requires a large fixed scale factor, or equivalently a small quantization step, in order for the watermark to remain invisible. Therefore, the robustness has to be compromised. Similar quantization techniques have been proposed to embed a cartoon or map image into a host image.

Quantization with frequency and spatial masking to embed watermarks into DCT
20 coefficients of 8x8 blocks has also been proposed. Watermarks using a small block size may
not survive the distortions introduced by filtering with a large kernel. The suggested
frequency masking model also becomes inaccurate for blocks larger than 16x16.

Yet another proposed method includes using the quantization index modulation to embed a watermark message into a host image. Message bits are used to select the pre-

defined quantizers. Theoretical results for some channel models have been discussed.

However, no experiments on real distortions have been reported.

Watermarks inserted in the middle and high frequencies may typically be very robust with respect to noise adding, nonlinear deformations of the gray scale, (e.g.,

5 contrast/brightness adjustment, gamma correction, histogram equalization), and cropping.

Since these advantages are complementary to that of low-frequency techniques, and

watermarks of low and middle frequencies are embedded into disjoint portions of the

spectrum, Fridrich proposed to embed both low and high frequency watermarks into the

image. To decode the hidden message in the low frequencies without the original image,

10 binary mapping may be used. A (watermark) mapping function (also called an index

function) may relate the watermarked transform coefficient to the watermark itself. Although

it has been shown that the watermarks may be very robust to different types of distortion,

there may be a serious security problem. The watermarks may be easily removed by

clustering the DCT coefficients using a histogram attack, which may search for the

15 parameters of the mapping function. If the intensity of some of the original pixels are guessed

and if the basis function is known, then the watermarks may be estimated and the general

watermark system fails. To overcome the histogram and the watermark-estimation attacks, it

has been proposed that some secret key-dependent basis functions could be used. Although

this scheme seems to be able to achieve better robustness to different distortions and high

20 security to attacks, it may require very high computation and a relatively large amount of

storage to generate the basis functions and to find the corresponding transform coefficients.

We will now discuss briefly an oblivious watermark approach, described in a paper by J. Fridrich, entitled "Combining low-frequency and spread spectrum watermarking", Proc. SPIE Int. Symp. on Optical Science, Engineering Instrumentation, San Diego, July 1998,

which uses a binary mapping function. A security problem will be disclosed using a histogram attack.

The oblivious low frequency watermarking of Fridrich is described as follows. Let

$f_o(p_j)$ be the intensity of an image at a j -th pixel $p_j = [x_j, y_j]^T, j \in \tilde{J}$, where $\tilde{J} = \{j \mid j = 0, 1, \dots$

, $n_p - 1\}$ consisting of the index of all n_p pixels in a raster scan order. Figure 9A shows some raster scan orders that may be used. The present invention may be practiced with any scan order, several of which are shown in figures 9A, 9B, 9C, and 9D. Let $m(f_o)$ and $\sigma^2(f_o)$ be the sample mean and variance of f_o . The image may be normalized by the following transform so that its sample mean becomes zero and its coefficients of discrete cosine transform (DCT) may fall into a pre-specified range.

$$f(p_j) = \frac{1024}{\sqrt{n_p}} \frac{f_o(p_j) - m(f_o)}{\sigma(f_o)} \quad (1)$$

Denoting the original and watermarked DCT coefficients of f as v_i and v'_i , let $i \in \tilde{I}$ where $\tilde{I} =$

$\{i \mid i = 0, 1, \dots, n_w - 1\}$ consists of the index of DCT coefficients in a zig-zag order. Then a

binary watermark sequence $w_i, i \in \tilde{I}, w_i \in \{-1, 1\}$ may be embedded to f by adjusting the

amplitude of v'_i , so that the distortion between v_i and v'_i is minimum and

$$w_i = M_0(|v'_i|). \quad (2)$$

where the mapping function

$$M_0(v') = (-1)^l \quad \text{if } v' \in I_l = [a^l, a^{l+1}), \quad a = \frac{1 + \alpha}{1 - \alpha} > 1, \quad \alpha > 0 \quad (3)$$

If $v_i < 1$, $v'_i = v_i$. The above mapping function is called an index function. It can be shown

that the maximum difference between v_i and v'_i is less than $|v_i|\alpha$. In order to maximize the

robustness with respect to image distortions, v_i' is chosen to be the middle point of interval I_{1l} .

To survive some common lossy compression and low-pass filtering, the watermarks may be embedded in the perceptually significant frequency bands with high energy, and the amount of change of different transform coefficients may be proportional to the amplitude of the 5 coefficient itself. The watermark encoding and decoding may be simplified if they are performed in a log-magnitude domain. Let $u_i = \ln|v_i|$, $u_i' = \ln|v_i'|$ and $\beta = \ln a$. The l -th interval in the log domain may be denoted by $I_{2l} = [l\beta, (l+1)\beta)$. The index of the interval where u is located may be determined by a locating function $l(u) = \lfloor \frac{u}{\beta} \rfloor$. The watermark may be generated by the following mapping function

$$\begin{aligned} w_1 &= M_1(u_i') \\ &= (-1)^{l_1(u_i')} \end{aligned} \tag{4}$$

and assign $u_i' = q(u_i')$, where $q(u_i) = (l(u_i) + 0.5)\beta$ is the quantization function. More

specifically, if $(-1)^{l_1(u_i')} = w_i$, then $u_i' = q(u_i)$. Otherwise, u_i' may be equal to either $q(u_i) + \beta$ or $q(u_i) - \beta$, depending on which is closer to u_i .

During watermark decoding, the watermark may be estimated from the received DCT

15 coefficient u_i'' as $\hat{w}_i = M_l(u_i'')$, where

$$u_i'' = u_i' + n_I \tag{5}$$

and n_I is the noise. Then the watermark sequence may be determined by using the following correlation function

$$corr = \max_{s \in (1-\Delta_s, 1+\Delta_s)} \frac{\sum_{i \in \tilde{I}} |v_i''|^\gamma \hat{w}_i(s v_i') w_i}{\sum_{i \in \tilde{I}} |v_i'|^\gamma} \tag{6}$$

where the scale factor s may be used to compensate the change of variance due to image distortions, and the weighting factor γ may be used to reduce the effect of small coefficients. The values $\Delta_s = 1/4$ and $\gamma = 1$ will be used in the disclosure of the present invention.

Combining with mid-frequency watermarking using the spread spectrum technique,

5 the above binary watermarking has been shown by Fredrich to be robust for many attacks.

However there arises a serious security problem. Since the watermarked coefficients u'_i are always located in the middle of the quantization intervals with a fixed size, a pirate may search for the correct quantization step using a histogram attack. Once the quantization step is found, the watermarks may be modified or removed. The histogram may be formed from 10 the quantized DCT coefficients with a guessed quantization step size. For the correct step size, a peak will be present in the middle of the quantization interval.

Fridrich has observed this problem. He also discussed the security problem faced under the watermark-estimation attack. If the original intensity of some pixels of a watermarked image can be guessed, then the watermarks may be estimated and removed by 15 solving a system of linear equations. To address both security problems, Fredrich proposed the use of key-dependent basis functions. He also demonstrated that his approach was quite robust to common distortions. However, his approach requires a high computation to generate the transform functions and to perform the forward or inverse transforms. To provide an alternative, the present invention will disclose a new class of mapping functions, 20 which may require only simple operations. These mapping functions may be controlled by a secret key. To combat the watermark-estimation attacks, some counter-attacks will also be disclosed.

What is needed is a simple and effective scheme to enhance the security and robustness of a low-frequency watermarking scheme that protects the watermarks by using a

10

secret (watermark) mapping function instead of a secret transform basis function. The scheme should also reduce the interference between the watermarks and the image itself by using a key-dependent quantization function. The scheme should also be generalized so that it may be applied to pixel-domain watermarking schemes. To combat the watermark-
5 estimation attack, a simple counterattack is also needed that that the use of key-dependent basis functions isn't needed.

Disclosure Of The Invention

One advantage of the invention is that it that protects watermarks by using a secret

10 (watermark) mapping function instead of a secret transform basis function.

Another advantage of this invention is that it reduces the interference between the watermarks and the image itself by using a key-dependent quantization function.

Yet a further advantage of this invention is that it is generalized so that it may be applied to pixel-domain watermarking schemes.

15 To achieve the foregoing and other advantages, in accordance with all of the invention as embodied and broadly described herein, a method for embedding a watermark into content.

The content contains content samples. The method including the steps of: receiving the content, creating a continuous watermark sequence from the watermark, for each content sample in a first predetermined order: calculating a sample mean, calculating a sample

20 variance, and normalizing the content. Further steps include generating a set of content coefficients from the content, generating a set of watermark coefficients from the watermark sequence, embedding the watermark in the content by adjusting the amplitude of the watermark coefficients so that the distortion between the content coefficients and the associated watermark coefficients are minimized using a secret mapping function, and
25 outputting the content.

11

In yet a further aspect of the invention, a method for a method for embedding a watermark into content, wherein the step of embedding the watermark in the content is performed by adjusting the watermark coefficients sequentially in a second predetermined order.

5 In yet a further aspect of the invention, an apparatus for embedding a watermark data into content including: a content preprocessor, the content preprocessor further including: a mean calculator; and a variance calculator; a content coefficient generator for generating content coefficients from the preprocessed content; a watermark sequence generator for generating a watermark sequence from the watermark data; a watermark coefficient generator 10 for generating watermark coefficients from the watermark sequence; and a watermark inserter for generating watermarked content. The watermark inserter may further include a key dependent sequencer; a secret mapping function device, the secret mapping function device receiving input from the key dependent sequencer; and a coefficient modifier for generating 15 watermarked content by adjusting the amplitude of the watermark coefficients so that the distortion between the content coefficients and the associated watermark coefficients are minimized using the secret mapping function device.

Additional objects, advantages and novel features of the invention will be set forth in part in the description which follows, and in part will become apparent to those skilled in the art upon examination of the following or may be learned by practice of the invention. The 20 objects and advantages of the invention may be realized and attained by means of the instrumentalities and combinations particularly pointed out in the appended claims.

Brief Description Of The Drawings

The accompanying drawings, which are incorporated in and form a part of the 25 specification, illustrate an embodiment of the present invention and, together with the

12

description, serve to explain the principles of the invention.

Figure 1 is a block diagram of a watermark insertion device as per an embodiment of the present invention.

Figure 2 is a block diagram of a watermark inserter as per an embodiment of the 5 present invention.

Figure 3 is a block diagram of a watermark extractor as per an embodiment of the present invention.

Figure 4 is a flow diagram showing how a watermark may be inserted into content as per an embodiment of the present invention.

10 Figure 5 is a flow diagram showing how a content may be preprocessed as per an embodiment of the present invention.

Figure 6 is a flow diagram showing watermark content being embedded into content data as per an embodiment of the present invention.

15 Figure 7 is a flow diagram showing how a watermark may be extracted from watermarked content as per an embodiment of the present invention.

Figure 8A is a diagram illustrating a square mapping function that may be used in practicing the present invention.

Figure 8B is a diagram illustrating a saw tooth mapping function that may be used in practicing the present invention.

20 Figure 8A is a diagram illustrating a triangular mapping function that may be used in practicing the present invention.

Figure 9A is a diagram illustrating horizontal processing orders that may be used when practicing the present invention.

13

Figure 9B is a diagram illustrating vertical processing orders that may be used when practicing the present invention.

Figure 9C is a diagram illustrating horizontal zig-zag processing orders that may be used when practicing the present invention.

5 Figure 9D is a diagram illustrating vertical zig-zag processing orders that may be used when practicing the present invention.

Best Mode For Practicing The Invention

The present invention is a new method for watermarking content using a novel class of

10 secure mapping watermarking functions using key-dependent mapping functions.

The binary watermarking scheme disclosed by Fredrich and discussed in the background section may be defeated by a histogram attack because the DCT coefficients may be clustered in the middle of the interval for the correct quantization step size β . The present invention overcomes this security problem by first replacing the binary watermark sequence 15 by a continuous sequence and by using secret mapping functions for different DCT coefficients. Replacing the binary watermark sequence by a continuous sequence may cause the DCT coefficients after quantization to spread out in the quantization interval, making the search for the original quantization step size β difficult. Using secret mapping functions for different DCT coefficients may make the histogram attack impossible because the mapping 20 functions may not be known and may be changed for different DCT coefficients.

In general, many functions may be used as the mapping functions. The functions may be generated by a program or retrieved from a look-up table. For the robustness concern to different distortions or attacks, it may be required that these functions are continuous or at least piecewise continuous. Otherwise, a small change of the DCT coefficients may introduce

a big error in the estimated watermark. To make these mapping functions practically useful, it may be important that these functions may be rapidly computed or generated in real-time and/or they do not require a large space to store their values. The present invention may use mapping functions which preferably take a simple function form. Their parameters may be controlled by some key-dependent random sequences to offer security.

Assume that the watermark sequence w_i is an uniformly distributed random sequence with zero mean and unit variance, i.e. $w_i \in [-\sqrt{3}, \sqrt{3}]$. One approach to embed this watermark sequence to the image is to generate the watermarked signal u'_i so that

$$u'_i = q(u_i) + \alpha_i w_i, \quad (7)$$

and the closest u'_i with respect to u_i is selected. It means that if $u_t = q(u_i) + \alpha_i w_i$, then u'_i may be equal to u_t , $u_t + \beta_i$ or $u_t - \beta_i$, depending on which is closest to u_i . For different DCT coefficients, the quantization step size may be controlled by a key-dependent sequence β_i . The sequence β_i may be uniformly distributed in $S_\beta = [\beta_{oi} - \Delta_\beta, \beta_{oi} + \Delta_\beta]$. The watermark strength may be controlled by α_i , which is preferably set to be $\alpha_i = \frac{\beta_i}{2\sqrt{3}}$, in order to map a quantization interval to a full dynamic range of the watermark sequence. From (7), the new mapping function may be found as

$$\begin{aligned} w_i &= \frac{1}{\alpha_i} [u'_i - q(u'_i)] \\ &= M_2(u'_i) \end{aligned} \quad (8)$$

The above mapping function may be a sawtoothed function as shown in Figure 8B. From (7), it may be shown that, the i -th DCT coefficient after watermarking may be related to the v_i and w_i by

$$v'_i = v_i \exp(\alpha_i w_i) \exp(\Delta v) \quad (9)$$

where $\Delta v = q(\ln|v'_i|) - \ln|v_i|$. The error Δv may come from the quantization process.

From (5) and (7), it may be shown that $w_i = M_2(u_i'') + n'_i$, where $n'_i = \frac{1}{\alpha_i} [q(u_i'') - q(u_i') -$

$n_i]$. If the noise n_i is of low energy, u_i'' may fall into the same quantization interval as u_i' , i.e.

5 $q(u_i'') = q(u_i')$. It implies that $w_i = M_2(u_i'') - n_i/\alpha_i$. Therefore, a good estimate of w_i from u_i'' may be

$$\hat{w}_{si} = M_2(u_i''). \quad (10)$$

The watermark sequence may be determined by using the correlation in (6). Note that only u_i'' may be required to find this watermark estimate. It means that the original image may not be required to extract the watermark sequence. Since the mapping function $M_2(u)$ may be easy to compute, the computation requirement for watermark encoding and decoding may be relatively low.

Since the mapping function $M_2(u)$ is preferably controlled by the secret random sequence β_i and each DCT coefficient may have a different quantization step size, it may be very difficult for a pirate to estimate the mapping functions for all DCT coefficients or the watermark sequence. Note that both values of the watermark sequence and the β_i may be continuous, which may make estimation even harder. The histogram of the quantized DCT coefficients for different β may be quite random, demonstrating that the watermarks as well as the mapping functions may be protected under this attack.

20 One more layer of security may be offered via the design of the mapping function by allowing a varying size of the quantization intervals for quantizing the DCT coefficients,

16

resulting in the interval length preferably varying for different i , i.e. $I_{3l} = [\sum_{j=0}^l \beta_i(j), \sum_{j=0}^{l+1} \beta_i(j)]$

for the l -th interval. This may require more computation for watermark encoding, watermark decoding and generating more random sequences for $\beta_i(j)$.

For the saw-toothed mapping function, there may be a problem for the robustness of

5 the watermark recovery. If the noise n_i makes the received u_i' fall out of the original

quantization interval, a large error may be introduced. It may specially be the case at the

borders of the quantization intervals, where an abrupt sign change may occur to the

watermark estimate. To overcome this problem, a triangle mapping function is proposed.

The basic idea is to eliminate the sharp changes in the saw-toothed function that causes the

10 sign change of the adding watermark. The mapping function in equation 10 therefore becomes

$$w_i = (-1)^{l(u_i')} \frac{1}{\alpha_i} [u_i' - q(u_i')] \\ = M_3(u_i') \quad (11)$$

To insert watermark, adjust u_i' so that

$$u_i' = q(u_i') + (-1)^{l(u_i')} \alpha_i w_i \quad (12)$$

This may be achieved by simply assigning $q(u_i) + (-1)^{l(u_i)} \alpha_i w_i$ to u_i' . There is no need

15 to find the closest u_i' due to the characteristics of the mapping function. Figure 8C shows the

triangle mapping function $M_3(u)$. To improve further the overall stealth, the above watermark

encoding and decoding may be modified as follows so that the final sign of the embedded

watermark may be controlled by an additional key-dependent random sequence $s_i \in \{0,1\}$.

$$w_i = (-1)^{l(u_i')} \frac{1}{\alpha_i} [u_i' - q(u_i')] \quad (13)$$

$$= M_4(u_i'). \quad (13)$$

$$u_i' = q(u_i') + (-1)^{l(u_i') + s_i} \alpha_i w_I \quad (14)$$

Similar to the saw-toothed function, if the noise n_i is not large, i.e. $q(u_i'') = q(u_i')$, then $w_i = M_4(u_i'') - n_i/\alpha_i$. A good estimate of w_i from u_i'' without knowing the u_i or u_i' becomes $\hat{w}_{ti} = M_4(u_i'')$.

For the binary mapping function, its security problem may be overcome by using

5 randomized quantization steps, i.e.

$$w_i = q(u_i') \text{ with key-dependent quantization step size } \beta_i.$$

$$= M_1'(u_i') \quad (15)$$

The watermark estimate of that becomes $\hat{w}_{bi} = M_1'(u_i'')$.

This scheme protects the watermarking system under histogram attack. Since each DCT coefficient has its own quantization step size, the attack which searches for a common 10 step size would fail and the histogram will appear to be random. Histograms for the binary and saw-toothed mapping functions with a random sequence of β_i may show no distinctive peak that can be identified and the resulting data display may show a randomized behavior.

For generalized mapping functions, periodic functions with key-dependent parameters may be used as follows

$$w(u_i) = f(A_i, f_i, \theta_i, u_i) \quad (16)$$

15 Where A_i may be the amplitude, f_i may be the period, θ_i may be the phase. This leads to

$$w_I(u_i) = \frac{1}{\alpha_i} [u_i' - q(u_i' - \theta_i)]$$

Hence

$$u_i' = q(u_i) + \alpha_i w_i(u_i) + \theta_i]$$

Which leads to

$$W_2(u) = A_i \cos (2\pi f_i(u_i) + \theta_i)$$

Rewatermarking may be accomplished with and without quantization, where the

5 received watermark coefficients may be described by

$$u_i' = u_i + (-1)^{l(u_i) + s_i} \alpha_i w_i$$

A truncated function may be used

$$\begin{aligned} l\beta & \quad 0 \leq x \leq l\beta \\ T_l(f_0) = x & \quad l\beta \leq x \leq (l+1)\beta \\ (l+1)\beta & \quad x \geq (l+1)\beta \end{aligned}$$

$$u_i' = t_l(u_i + (-1)^{l(u_i) + s_i} \alpha_i w_i)$$

10 For the binary, saw-toothed, and triangle mapping functions in equations 4, 10, and 13, respectively, their distortions during watermark encoding and the watermark estimate error during watermark decoding are analyzed. Note that since these mapping functions are periodic, analyzing one period of each function is sufficient without loss of generality. Let

$$\Delta u_{bi} = u_i - u'_{bi}, \Delta u_{si} = u_i - u'_{si}, \Delta u_{ti} = u_i - u'_{ti}, \Delta w_{bi} = w_i - \hat{w}_{bi}, \Delta w_{si} = w_i - \hat{w}_{si}, \text{ and } \Delta w_{ti} = w_i - \hat{w}_{ti}.$$

15 Denote regions according to the location index $l(u_i')$ as $R_a = \cup_k [(l(u_i') + 2k)\beta_i, (l(u_i') + 2k +$

$1)\beta_i]$, $R_{b1} = \cup_k [(l(u_i') + 2k + 1)\beta_i, (l(u_i') + 2k + 1.5)\beta_i]$, $R_{b2} = \cup_k [(l(u_i') + 2k + 1.5)\beta_i, (l(u_i') + 2k + 2)\beta_i]$, and $R_b = R_{b1} \cup R_{b2}$. Note that the period of the mapping function is $2\beta_i$. Let

$$n_i = 2k\beta_i + n_{li}, \quad k=0, \pm 1, \pm 2, \dots \quad (16)$$

where $n_{li} \in (-0.5\beta_i - \alpha_i w_i, 1.5\beta_i - \alpha_i w_i)$.

5 For the binary mapping function, if the log-magnitude of the i -th DCT coefficient after watermarking, u_i' , may fall into the same interval as that of u_i , i.e. $q(u_i') = q(u_i)$, the watermark encoding error simply equals to the quantization error. It means that $|\Delta u_{bi}| = |u_i - q(u_i)| \in [0, \beta_i/2)$ because $u_i' = q(u_i')$. If u_i' falls into the interval before or after the interval of u_i , i.e. $q(u_i') = q(u_i) \pm 1$, then $|\Delta u_{bi}| \in [\beta_i/2, \beta_i)$ (c.f.\ Figure 8A). Similarly, for the saw-toothed mapping 10 function, if $q(u_i') = q(u_i)$, then the watermark encoding error equals to the quantization error and $|\Delta u_{si}| \in [0, \beta_i/2)$. Otherwise, $|\Delta u_{si}| \in (0, \beta_i/2]$. For the triangle mapping function, as 15 mentioned before, $q(u_i')$ always equals to $q(u_i)$. Therefore, the watermark encoding error $|\Delta u_{ti}| \in [0, \beta_i)$. Table 1 summarizes these results. As we can see, for the same β_i , the triangle mapping function may have a larger encoding error than that of the saw-toothed mapping function.

For the binary mapping function, if the received DCT coefficient u_i'' falls into R_a , the watermark w_i can be decoded correctly, i.e. $\Delta w_{bi} = 0$. Otherwise, the sign of w_i maybe reversed which may lead to a decoding error of 2.

For the sawtoothed mapping function, from equation 10, we have

$$\begin{aligned} \Delta w_{si} &= w_i - \hat{w}_{si} \\ &= \frac{1}{\alpha_i} (q(u_i'') - q(u_i') - n_i) \end{aligned}$$

$$\begin{aligned}
& 20 \\
& = \frac{1}{\alpha_i} \left(\left\lfloor \frac{u_i' + 2k\beta_i + n_{li}}{\beta_i} \right\rfloor \beta_i - \left\lfloor \frac{u_i'}{\beta_i} \right\rfloor \beta_i - (2k\beta_i + n_{li}) \right) \\
& = \frac{1}{\alpha_i} \left(\left\lfloor \frac{u_i' + n_{li}}{\beta_i} \right\rfloor \beta_i - \left\lfloor \frac{u_i'}{\beta_i} \right\rfloor \beta_i - n_{li} \right) \tag{17}
\end{aligned}$$

If $u_i'' \in R_a$, then $\left\lfloor \frac{u_i' + n_{li}}{\beta_i} \right\rfloor \beta_i = \left\lfloor \frac{u_i'}{\beta_i} \right\rfloor \beta_i$. Therefore, $\Delta w_{si} = \frac{n_{li}}{\alpha_i} = -2\sqrt{3} \frac{n_{li}}{\beta_i}$ since $\alpha_i = \beta_i/(2\sqrt{3})$. If

$u_i'' \in R_b$ and $n_{li} \geq 0$, then $\left\lfloor \frac{u_i' + n_{li}}{\beta_i} \right\rfloor \beta_i = \left\lfloor \frac{u_i'}{\beta_i} \right\rfloor \beta_i + \beta_i$. This may imply that $\Delta w_{si} = \frac{\beta_i - n_{li}}{\alpha_i} = 2\sqrt{3}$

$(1 - \frac{n_{li}}{\beta_i})$. Finally, if $u_i'' \in R_b$ and $n_{li} < 0$, we have $\left\lfloor \frac{u_i' + n_{li}}{\beta_i} \right\rfloor \beta_i = \left\lfloor \frac{u_i'}{\beta_i} \right\rfloor \beta_i - \beta_i$. In other words, Δw_{si}

$$5 = \frac{-\beta_i - n_{li}}{\alpha_i} = -2\sqrt{3}(1 - \frac{|n_{li}|}{\beta_i}).$$

For the triangle mapping function, if $u_i'' \in R_a$, i.e. $(-1)^{l(ui'')} = (-1)^{l(ui'')}$, we have

$$\begin{aligned}
\Delta w_{ti} &= w_i - M_3(u_i'') \\
&= (-1)^{l(ui'')} \left(-\frac{n_{li}}{\alpha_i} \right) \\
&= (-1)^{l(ui'')} (-2\sqrt{3} \frac{n_{li}}{\beta_i}) \tag{18}
\end{aligned}$$

On the other hand, if $u_i' \in R_b$, i.e. $(-1)^{l(ui'')} = (-1)^{l(ui')+1}$, then

$$\Delta w_{ti} = (-1)^{l(ui')} \frac{1}{\alpha_i} [u_i' + u_i'' - q(u_i') - q(u_i'')] \tag{19}$$

10 Since $\alpha w_i + n_{li} = \beta_i + (u_i'' - q(u_i''))$, Δw_{ti} can be rewritten as

$$\begin{aligned}
\Delta w_{ti} &= (-1)^{l(ui')} [2w_i + (n_{li} - \beta_i)/\alpha_i] \\
&= (-1)^{l(ui')} [2w_i + 2\sqrt{3}(n_{li}/\beta_i - 1)] \tag{20}
\end{aligned}$$

Table 2 summarizes these results.

Comparing the saw-toothed and the triangle mapping functions, when $u_i'' \in R_a$, they

may have the same watermark decoding error, i.e. $|\Delta w_{si}| = |\Delta w_{ti}| = 2\sqrt{3} \frac{|n_{li}|}{\beta_i}$. If $u_i'' \in R_b$ and $w_i \geq 0$, $|\Delta w_{si}| - |\Delta w_{ti}| = 2[\frac{\beta_i - n_{li}}{\alpha_i} - w_i]$. This leads to two different cases. If $u_i'' \in R_{b1}$, $\alpha_i w_i < \beta_i - n_{li}$, then we have $|\Delta w_{si}| > |\Delta w_{ti}|$. Similarly, if $u_i'' \in R_{b2}$, $\alpha_i w_i \geq \beta_i - n_{li}$, we find $|\Delta w_{si}| < |\Delta w_{ti}|$.

Similar results for other cases can be derived. The results are summarized in Table 3.

$Q(u_i'')$	$ \Delta u_{bi} $	$ \Delta u_{si} $	$ \Delta u_{ti} $
$q(u_i)$	$[0, \beta_i/2)$	$[0, \beta_i/2)$	$[0, \beta_i)$
$q(\beta_i) \pm 1$	$[\beta_i/2, \beta_i)$	$(0, \beta_i/2]$	Not apply

Table 1. Watermark encoding errors for binary, saw-toothed and triangle mapping functions.

u_i''	$ \Delta w_{bi} $	$ \Delta w_{si} $	$ \Delta w_{ti} $
R_a	0	$2\sqrt{3} \frac{ n_{li} }{\beta_i}$	$2\sqrt{3} \frac{ n_{li} }{\beta_i}$
R_b	2	$2\sqrt{3} \sim 1 - \frac{ n_{li} }{\beta_i} $	$ 2\sqrt{3} \frac{ n_{li} }{\beta_i} - 2 w_i $

Table 2 - Watermark decoding errors for binary, saw-toothed and triangle mapping functions.

u_i''	$w_i \geq 0$	$w_i < 0$
R_a	$ \Delta w_{ti} = \Delta w_{si} $	$ \Delta w_{ti} = \Delta w_{si} $
R_{b1}	$ \Delta w_{ti} < \Delta w_{si} $	$ \Delta w_{ti} > \Delta w_{si} $
R_{b2}	$ \Delta w_{ti} > \Delta w_{si} $	$ \Delta w_{ti} < \Delta w_{si} $

Table 3 - Comparisons of watermark decoding errors between saw-toothed and triangle mapping functions.

One type of attack to a watermark system is to estimate the unknown watermarks from a given watermarked image f_o' , by assuming that part of the original image f_o may be guessed

5 or closely approximated. This is called the watermark-estimation attack. For example, the

intensity of a uniform region in the original image may be reasonably approximated by the

sample mean of that region. Assume that the watermark sequence is embedded in some

transform coefficients. For convenience, the original intensity of pixel p_j may be represented

by $f_o(p_j) = \sum_i v_i \Phi_i(p_j, \omega_i)$, where v_i is the i -th transform coefficients of the corresponding

10 basis function $\Phi_i(p_j, \omega_i)$, and $\omega_i = [\omega_{xi}, \omega_{yi}]^T$ denotes the frequency component of this 2-D transform. Note that a sequential order may always be imposed to the index of the frequency components of a 2-D transform, such as a zigzag order of DCT coefficients. Figures 9A, 9B, 9C, and 9D show examples of various orders that may be used.

Let v_i' be the corresponding watermarked coefficients. The difference between the

15 original and watermarked images at pixel p_j may therefore be

$$f_o(p_j) - f_o'(p_j) = \sum_{i \in I} v_{di} \Phi_i(p_j, \omega_i) \quad (21)$$

where $v_{di} = v_i - v_i'$. Under the watermark-estimation attack, if a pirate guesses the original intensity of a sufficient number of pixels, the value of v_{di} may be determined by solving the above linear system. If the watermarking scheme is not properly designed, the watermark

20 sequence w_i may be easily estimated. For example, one approach may be to embed the

watermark sequence w_i as $v_i' = v_i(1 + \alpha w_i)$. Given v_i' and v_{di} , the watermark sequence may

be found by $\alpha w_i = \frac{v_i'}{v_i' + v_{di}}$. Key-dependent basis functions may be used to protect the

watermarks. Since the basis functions may be kept secret, a pirate may not find the transform coefficients, neither v_i' nor v_{di} . For key-dependent mapping functions as per the present invention, since the mapping functions are preferably unknown, the watermarks may not be determined even if the pirate knows the transform function. As a result, both Fridrich's and 5 our approach may keep the watermarks secure, while our approach requires much lower computations.

Another counterattack to offend the watermark-estimation attack may be to add some noise to the image to corrupt quality of the estimation of v_{di} . The added noise may make the estimation of watermarks for this attack unusable. However, if the intention of the pirate is to 10 remove the watermarks instead of extracting it, the above watermark-estimation attack may causes a serious problem. If v_i' and v_{di} are available, then v_i may be directly computed from $v_i = v_i' + v_{di}$. As a result, the watermark information may be removed completely by replacing v_i' of the watermark image by v_i . This problem may not be overcome by either our proposed 15 mapping functions, nor adding noise to the watermark image. The approach of using the key-dependent basis functions may also fail. A pirate may select some well-known basis functions and estimate v_i with respect to these basis functions. Such a replaced v_i may still be used to remove the watermarks that are embedded in the transform coefficients with respect to 20 the unknown key-dependent basis functions. The reason for that is the representation of the original image with respect to the basis functions may be unique, and the transform coefficients using two different basis functions may be related by a linear or non-linear transformation.

Fortunately, there is a simple solution for solving this problem. For the pixels whose 25 intensity may be estimated easily, after watermarking, the pixels in the watermarked image may be replaced by the pixels in the original image. In this case, v_{di} may not be estimated because the left hand side of (23) may be equal to zero. The new transform coefficients of the

new watermarked image with this replacement should be quite close to the original v'_i because only a small portion of pixel intensities are affected. This treatment should not degrade the picture quality since it only brings the final image to be closer to the original, and most likely such substitution takes place at uniform regions. The detection of the watermark should also 5 remain robust since the majority of the pixels are not altered and may be used for watermark decoding.

Furthermore, some experiments have been performed for the watermark-estimation attack. It was found that the estimate of v_{di} had a large error even when there was only 10 rounding noise in the watermark image. A routine of singular value decomposition was adopted to avoid the numerical problem caused by a singular matrix in solving equation (23). Therefore, the watermark-estimation attack seems to be less damaging.

We will now start to describe some embodiments of the present invention by referring to figures 1 and 2. Figure 1 is a block diagram of a watermark insertion device as per an embodiment of the present invention. Figure 2 is a block diagram of a watermark inserter 150 15 as per an embodiment of the present invention. Content **100** may be input to a content preprocessor **110**. The content may be still any type of information including images, video, and music. The content preprocessor **110** preferably normalizes the image and may include a mean calculator **112** and variance calculator **114** for calculating the mean and variance values 20 of the content **100**. After being preprocessed by the content preprocessor **110**, a content coefficient generator **120** may generate content coefficients. These coefficients may be coefficients for any type of function that may be used to describe the content, such as DCT coefficients. A watermark **102** may be converted into a watermark sequence by a watermark sequence generator **130**. The watermark sequence may then be input to a watermark 25 coefficient generator **140** which may generate coefficients that may be compatible with the content coefficients. A watermark inserter **150** accepts as input both the content coefficients

202 and the watermark coefficients 204, and modifies them using a coefficient modifier 212.

A key dependent sequencer 216 outputs a sequence to a secret mapping function device 214.

The output of the secret mapping function device 214 may be used by the coefficient modifier 212 in generating watermarked content 160 by adjusting the amplitude of the watermark 5 coefficients 204 so that the distortion between the content coefficients 202 and the watermark coefficients 204 may be minimized.

Figure 3 is a block diagram of a watermark extractor as per an embodiment of the present invention. The watermark extractor 300 preferably accepts as input watermarked content 302 and outputs a watermark sequence 304. Watermark estimator 310 estimates a 10 watermark from the watermarked content 302, a mapping function 314, and noise 316. The mapping function 314 uses input from a key dependent sequencer 312 in generating its sequence. A correlator may accept as input the watermarked content 302, a scale factor 322 and a weight factor 324 and uses a correlation function to generate the watermark sequence 304.

15 Figure 4 is a flow diagram showing how a watermark may be inserted into content as per an embodiment of the present invention. First the content may be received for processing at step S404. A continuous watermark sequence may be generated at step S404. Step S406 preprocesses the content. The preprocessing may normalize the content and may include mean and variance calculations. At step S408, the watermark is inserted into the content. 20 Finally, at step S410 the watermarked content is output.

Figure 5 is a flow diagram showing how a content may be preprocessed as per an embodiment of the present invention. This diagram is an expansion of step S406. A content sample pointer is initialized at step S502. A sample mean and variance may be calculated at step S504. The content may then be normalized around the content sample at step S506, after 25 which the sample pointer may be incremented per a first predefined order. The order may be

any number of orders such as those shown in figures 9A, 9B, 9C, and 9D. Next, a determination is made at step **S510** if the process is complete. If the determination is positive, the process stops, otherwise the processing continues at step **S504**.

Figure 6 is a flow diagram showing watermark content being embedded into content data as per an embodiment of the present invention. This diagram is an expansion of block **S408**. Content coefficients may be generated at step **S602** and watermark coefficients may be generated at step **S604**. A coefficient pointer may be initialized at step **S606**. At step **S608**, the amplitude of a watermark coefficient being pointed to by the coefficient pointer may be adjusted so that the distortion between the watermark coefficient and its associated content coefficient are minimized using a secret mapping function. Next, a determination may be made at step **S610** if the process is complete. If the determination is positive, the process stops, otherwise the processing continues at step **S608**.

Figure 7 is a flow diagram showing how a watermark may be extracted from watermarked content as per an embodiment of the present invention. Watermarked content coefficients may be received at step **S702**. An estimated watermark using the received coefficients, a mapping function, and noise may be generated at step **S704**. Next, a correlation function may be used to determine the watermark sequence at step **S706**. The correlation function may use a scale factor a weighting factor, the watermarked content, and the watermark estimation in determining the watermark sequence. The watermark sequence may be output at step **S708**.

A simple but effective way to protect the watermarks for oblivious watermarking by using a new class of mapping functions has been disclosed. These functions may be controlled by key-dependent random sequences. The watermark encoding and decoding may only require a simple computation. A security problem of a binary mapping function may be overcome by using random quantization steps. The disclosed mapping functions may be

applied to pixel-based approaches and other transform-based approaches including the key-dependent basis functions. The discussion on watermark-estimation attack indicates that this attack may be defeated easily. Thus, the use of key-dependent mapping functions may provide an alternative to build a secure and robust oblivious system instead of using the time-consuming key-dependent basis functions.

The foregoing descriptions of the preferred embodiments of the present invention have been presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed, and obviously many modifications and variations are possible in light of the above teaching. The illustrated 10 embodiments were chosen and described in order to best explain the principles of the invention and its practical application to thereby enable others skilled in the art to best utilize the invention in various embodiments and with various modifications as are suited to the particular use contemplated. For example, one skilled in the art will recognize that the present 15 invention may be used with other types of content besides just images such as music, video, and data. It is intended that the scope of the invention be defined by the claims appended hereto.

28
CLAIMS

We claim:

- 1 1. A method for embedding a watermark into content, said content containing content
2 samples, comprising the steps of:
 - 3 (a) receiving said content;
 - 4 (b) creating a continuous watermark sequence from said watermark;
 - 5 (c) for each content sample in a first predetermined order:
 - 6 (i) calculating a sample mean;
 - 7 (ii) calculating a sample variance; and
 - 8 (iii) normalizing said content;
 - 9 (d) generating a set of content coefficients from said content;
 - 10 (e) generating a set of watermark coefficients from said watermark sequence;
 - 11 (f) embedding said watermark in said content by adjusting the amplitude of said
12 watermark coefficients so that the distortion between the content coefficients
13 and the associated watermark coefficients are minimized using a secret
14 mapping function; and
 - 15 (g) outputting said content.
- 1 2. The method according to claim 1 wherein said step of embedding said watermark in
2 said content is performed by adjusting the watermark coefficients sequentially in a
3 second predetermined order.
- 1 3. The method according to claim 1 wherein said digital content is an image and said
2 content sample is a pixel.

1 4. The method according to claim 1 wherein said secret mapping function has
2 parameters, and said parameters are controlled by one or more key-dependent
3 sequences.

1 5. The method according to claim 4 wherein said key-dependent sequences are key-
2 dependent random sequences.

1 6. The method according to claim 4 wherein at least one of said key-dependent
2 sequences are uniformly distributed.

1 7. The method according to claim 4 wherein at least one of said key-dependent
2 sequences is continuous.

1 8. The method according to claim 4 wherein at least one of said key-dependent
2 sequences is secret.

1 9. The method according to claim 1 wherein each watermark coefficient may have a
2 different quantization step size.

1 10. The method according to claim 1 wherein said secret mapping function is a
2 sawtoothed function.

1 11. The method according to claim 1 wherein said secret mapping function is a triangle
2 mapping function.

1 12. The method according to claim 1 wherein said secret mapping function is a binary
2 function using randomized quantization steps.

1 13. The method according to claim 1 wherein said secret mapping function is generated by
2 a program.

1 14. The method according to claim 1 wherein said secret mapping function is continuous.

1 15. The method according to claim 1 wherein said secret mapping function is piecewise
2 continuous.

1 16. The method according to claim 1 wherein said secret mapping function is a look-up
2 table.

1 17. The method according to claim 1 wherein said secret mapping function is a pixel
2 based function.

1 18. The method according to claim 1 wherein said first predetermined order is a raster
2 scan order.

1 19. The method according to claim 2 wherein said second predetermined order is a zig-zag
2 order.

1 20. A method for extracting a watermark sequence from watermarked content comprising
2 the steps of:

31

- 3 (a) receiving watermarked content comprising received coefficients;
- 4 (b) generating an estimated watermark determined by received coefficients, and a
- 5 mapping function;
- 6 (c) generating a watermark sequence using a correlation function, said correlation
- 7 function using the watermarked content, the estimated watermark, a scaling
- 8 factor, and a weighting factor per a predetermined equation; and
- 9 (d) outputting the watermark sequence.

1 21. An apparatus for extracting a watermark sequence from watermarked content
2 comprising:

- 3 (a) a noise source;
- 4 (b) a key dependent sequencer;
- 5 (c) a mapping function having parameters, at least one of said parameters
6 receiving input from said key dependent sequencer;
- 7 (d) a watermark estimator, said watermark estimator generating a watermark
8 estimate from the watermarked content, and the mapping function.
- 9 (e) a scale factor;
- 10 (f) a weight factor; and
- 11 (g) a correlator, said correlator generating the watermark sequence from the
12 watermarked content, the scale factor, the weight factor and the watermark
13 estimate.

1 22. An apparatus for embedding a watermark data into content including:

- 2 (a) a content preprocessor, said content preprocessor further including:
- 3 (i) a mean calculator; and

- 4 (ii) a variance calculator;
- 5 (b) a content coefficient generator for generating content coefficients from the
- 6 preprocessed content;
- 7 (c) a watermark sequence generator for generating a watermark sequence from the
- 8 watermark data;
- 9 (d) a watermark coefficient generator for generating watermark coefficients from
- 10 the watermark sequence; and
- 11 (e) a watermark inserter for generating watermarked content.

卷之三

1 23. An apparatus according to claim 22, wherein said watermark inserter further includes:

2 (a) a key dependent sequencer;

3 (b) a secret mapping function device, said secret mapping function device

4 receiving input from said key dependent sequencer; and

5 (c) a coefficient modifier for generating watermarked content by adjusting the

6 amplitude of the watermark coefficients so that the distortion between the

7 content coefficients and the associated watermark coefficients are minimized

8 using the secret mapping function device.

A method for embedding a watermark into content is disclosed. The content contains content samples. The method including the steps of: receiving the content, creating a continuous watermark sequence from the watermark, and for each content sample in a first predetermined order: calculating a sample mean, calculating a sample variance, and normalizing the content. Further steps include generating a set of content coefficients from the content, generating a set of watermark coefficients from the watermark sequence, embedding the watermark in the content by adjusting the amplitude of the watermark coefficients so that the distortion between the content coefficients and the associated watermark coefficients are minimized using a secret mapping function, and outputting the content. The mapping functions may be controlled by a key-dependent random sequence to protect the watermarks.

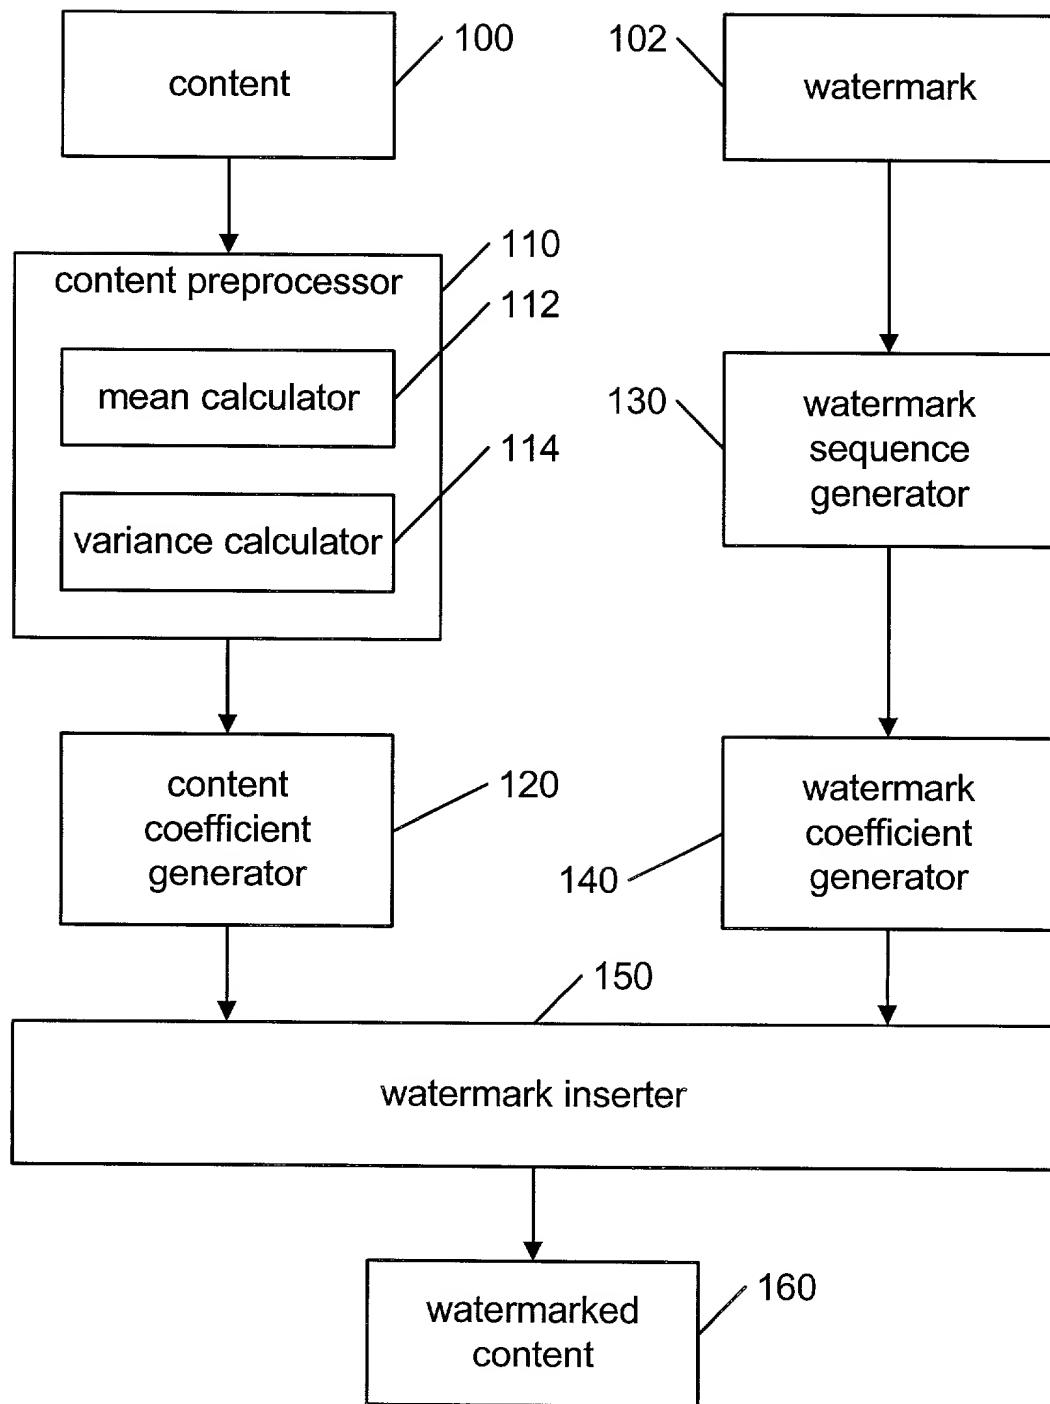


Figure 1

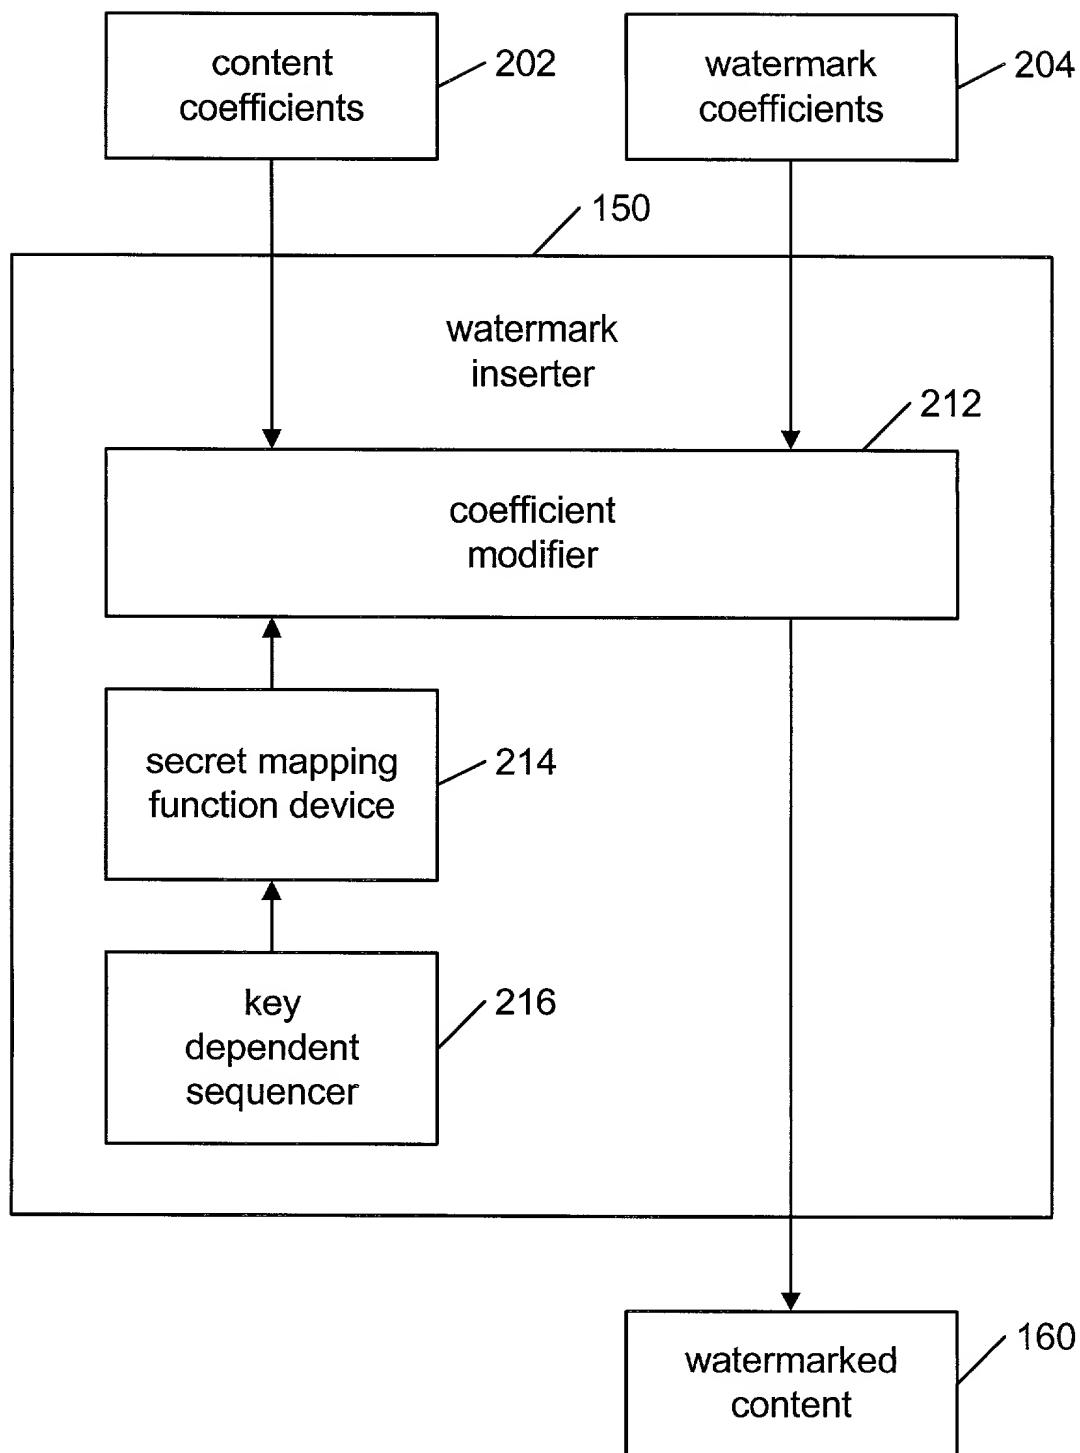


Figure 2

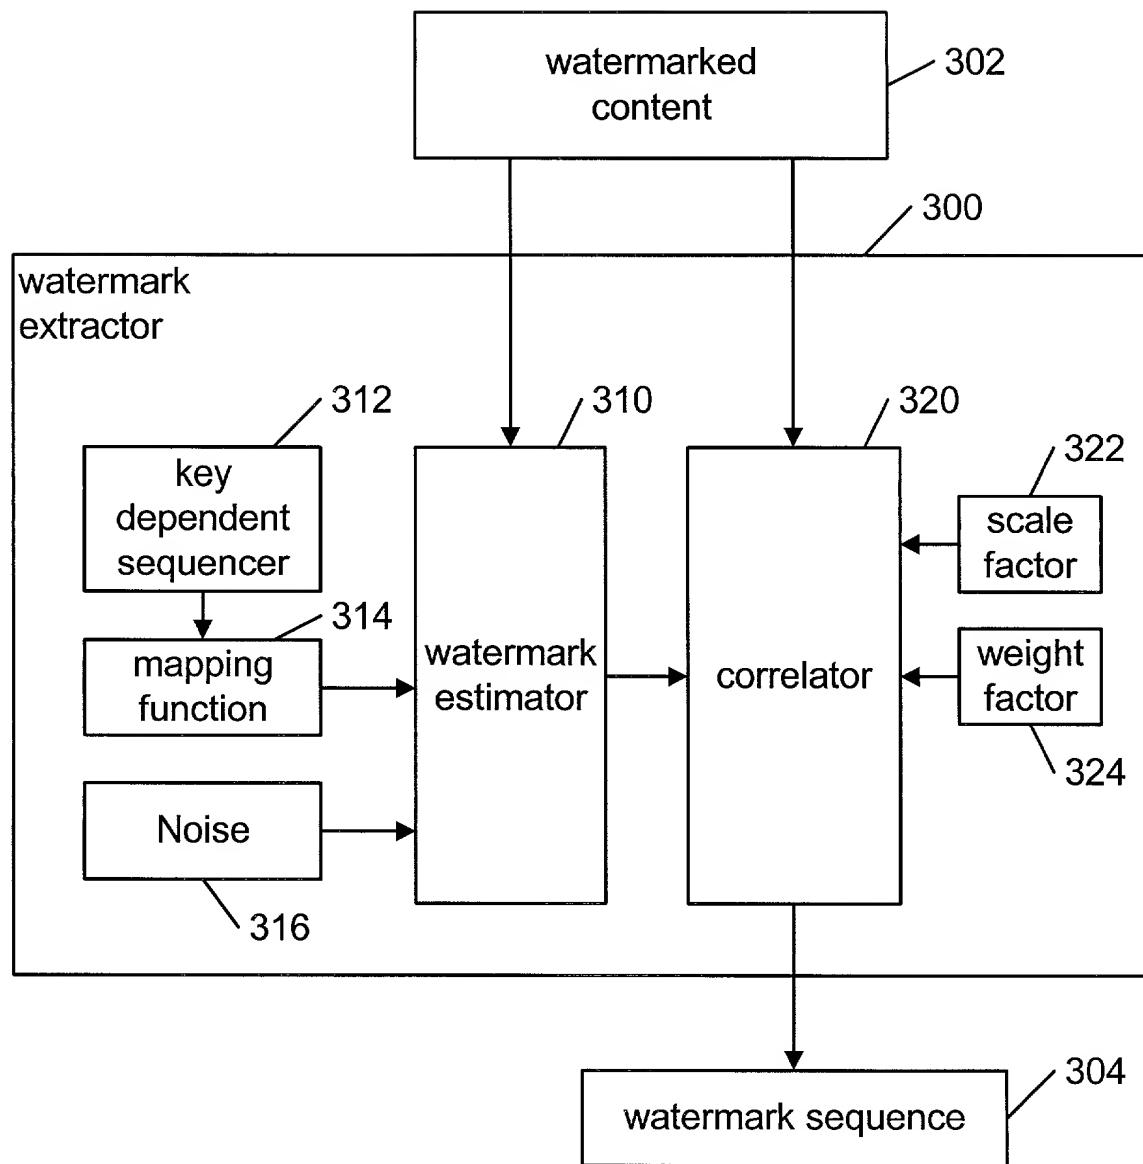
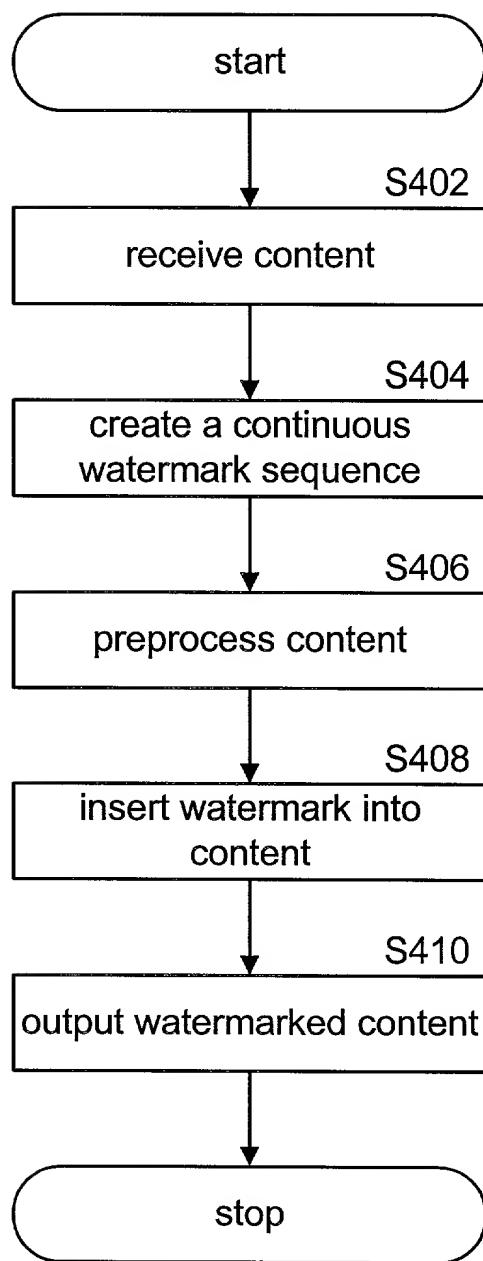


Figure 3

**Figure 4**

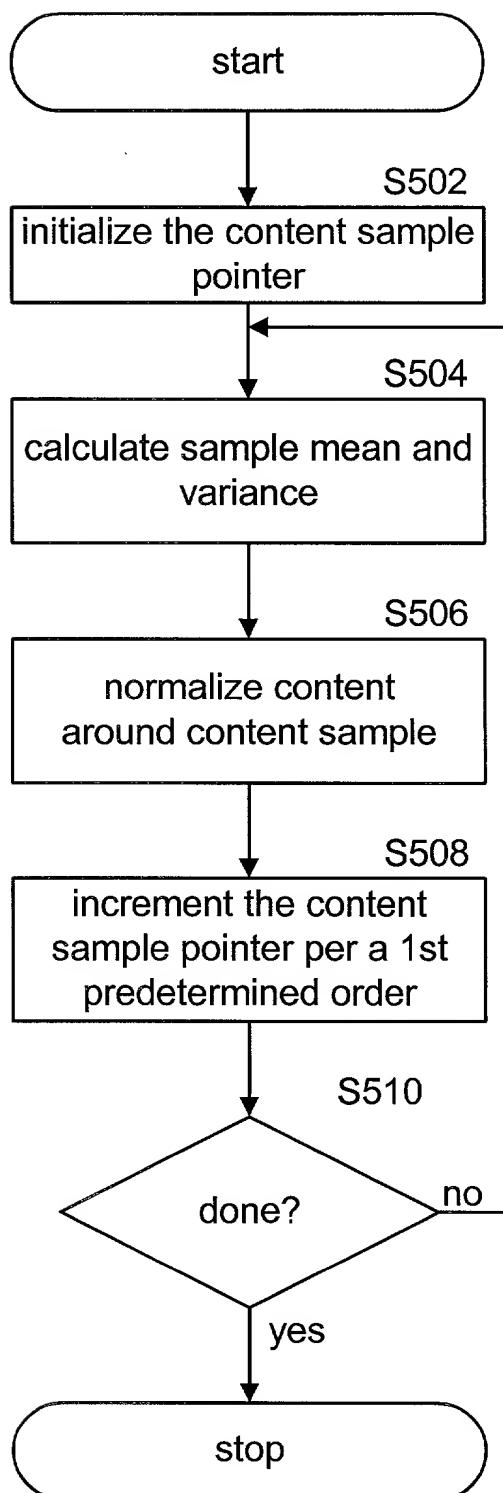


Figure 5

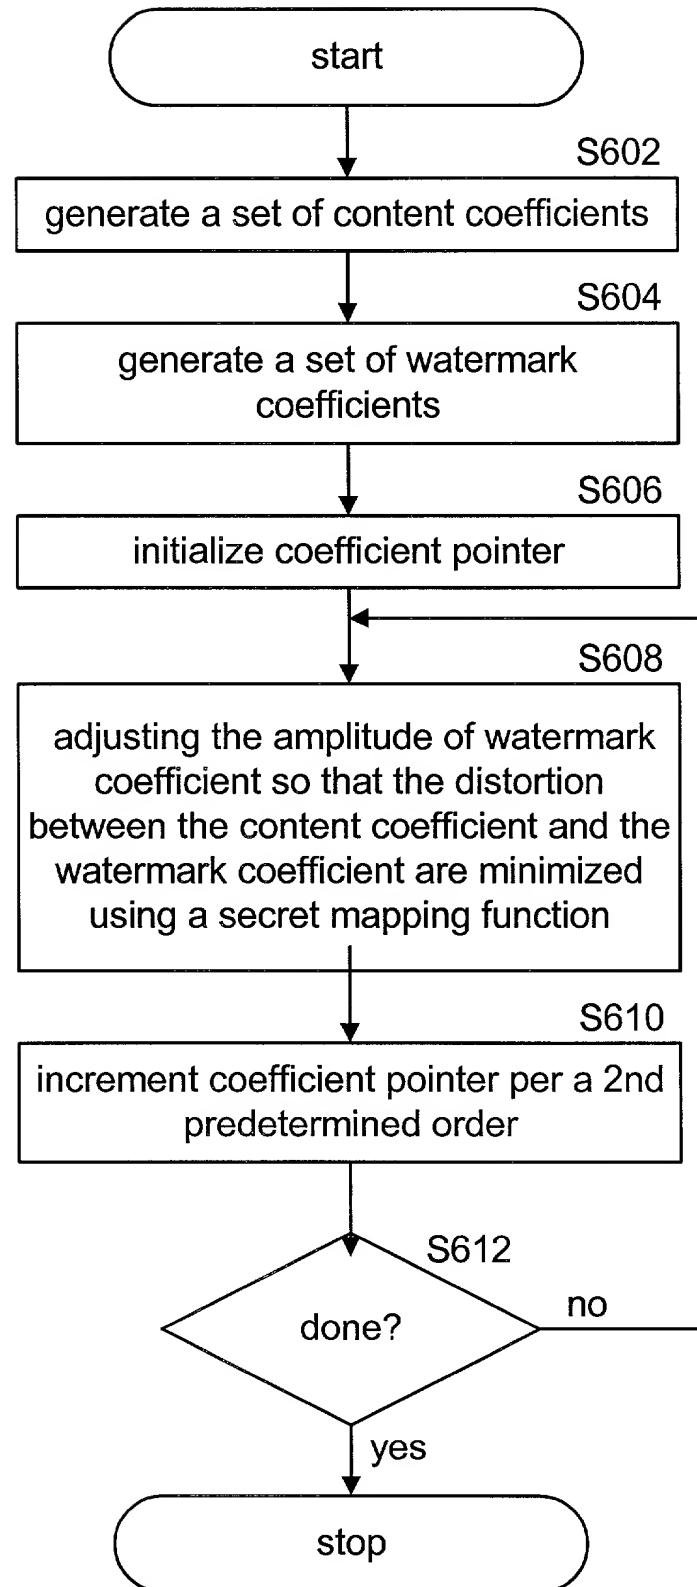
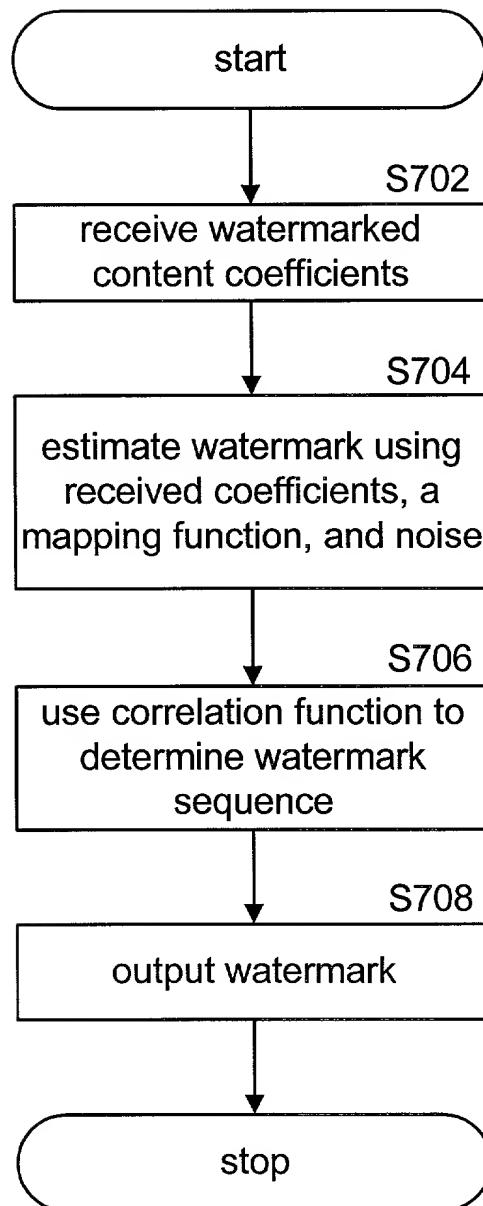


Figure 6

**Figure 7**

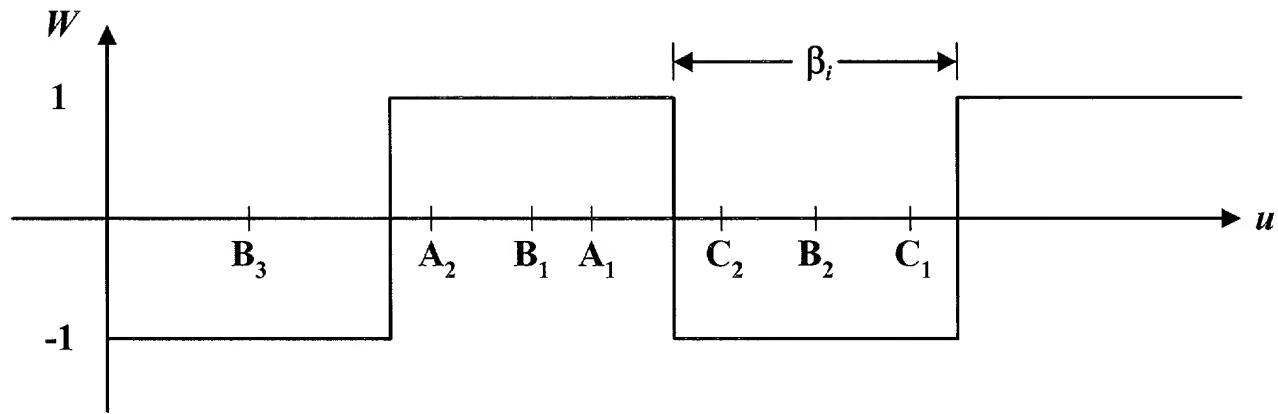


Figure 8A

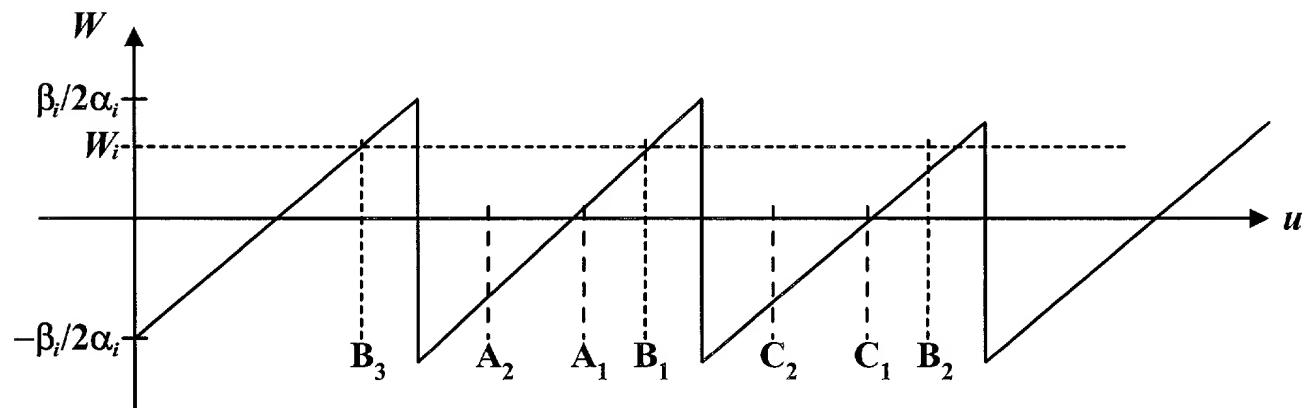


Figure 8B

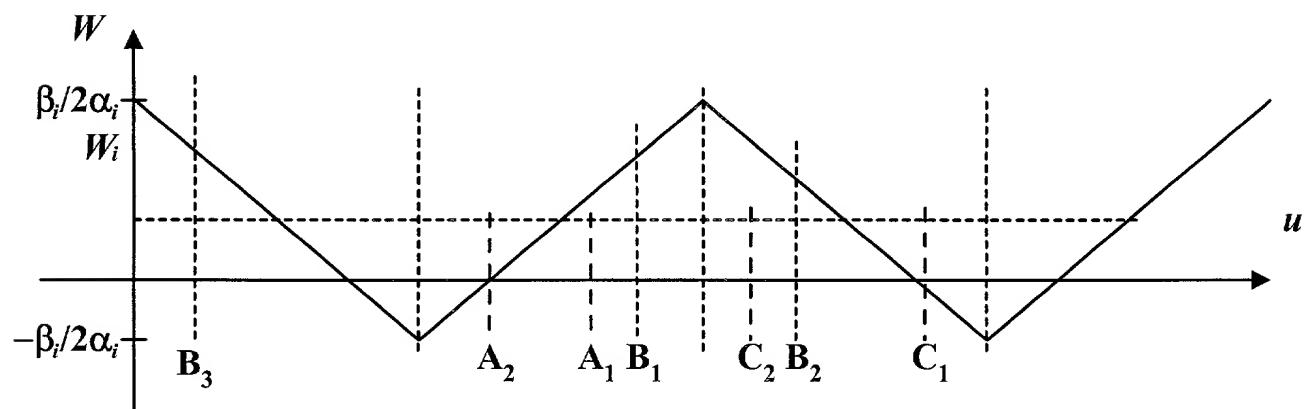


Figure 8C

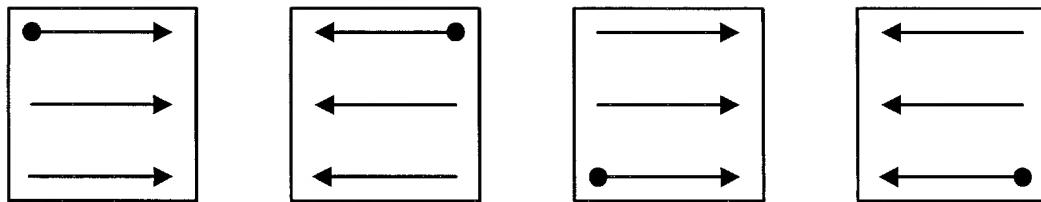


Figure 9A

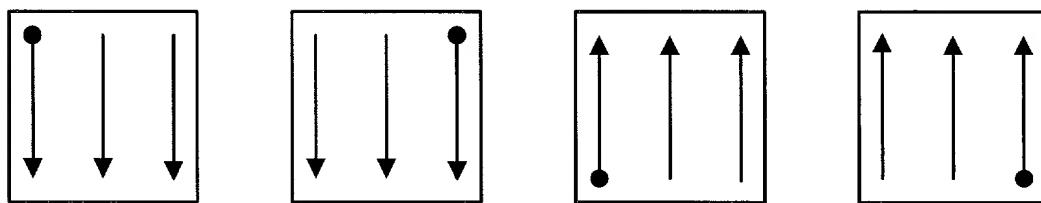


Figure 9B

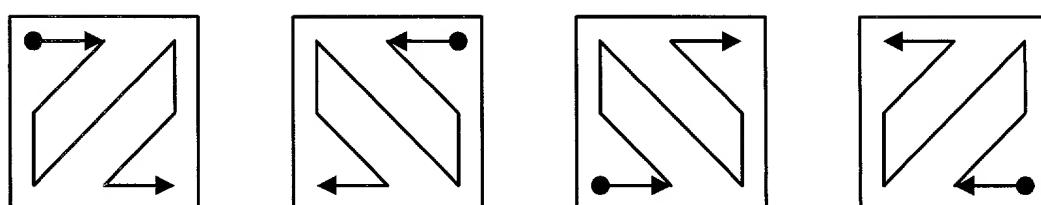


Figure 9C

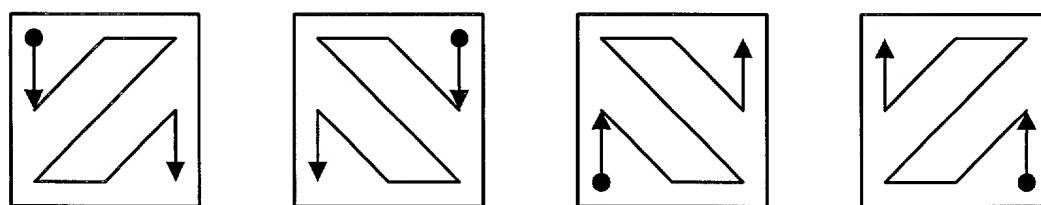


Figure 9D